



INGROUND & RECESSED TYPE LED LAMP

 Product&Family Code: **079 003 0002**
HL 940L
SAFİR


Technical Drawing

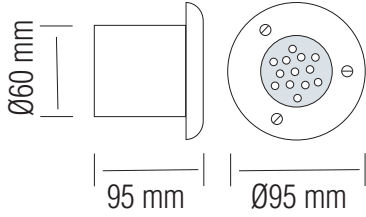

Photometric Diagram

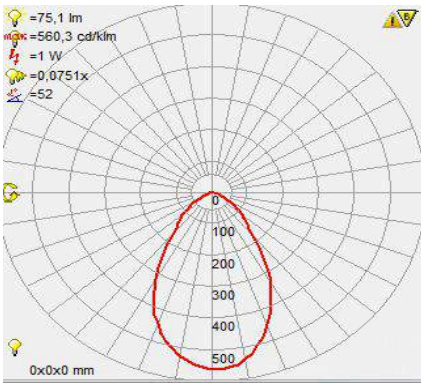

Technical Data

Voltage (V)	220-240V
Product Wattage (W)	1.2
Equivalence with incandescent lamp	9.6
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	WHITE - BLUE
Materials	Aluminium
Protection Class	I
Dimmable	No
EEI	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	75
Luminous Efficacy (lm/W)	62,5
Rated Life (hrs) ⌚	50.000
IP Rating	67
Power Factor	>0.8
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x25.000

Applications

- Stairwells, walkways, pedestrian areas, accent lighting, hotels & leisure, bars & restaurants, gardens & landscaping



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.

