



LED EDGE SLIM LIGHT PANEL

Product&Family Code: 056 018 0050

SUPERNOVA 3CCT

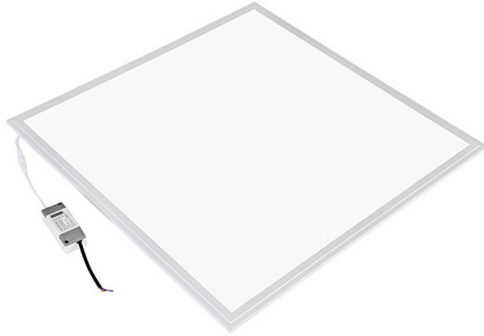

BACKSIDE



8 mm

CCT ADJUSTABLE

CCT Selectable by DIP Switch



3000K

4000K

6500K

Technical Data

Voltage (V)	170-265V
Product Wattage (W)	50
Equivalence with incandescent lamp	400
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	3CCT
Materials	Aluminium
Protection Class	I
Dimmable	No
EEL	-
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	5000
Luminous Efficacy (lm/W)	100
Rated Life (hrs) ⌚	40.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x20.000

Applications

- Indoor applications; Business Center, Airport, Car Park, Cinema, Gallery, Hospital, Hotel, Museum etc.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.

Technical Drawing

