


FLAG STICKER DRAW

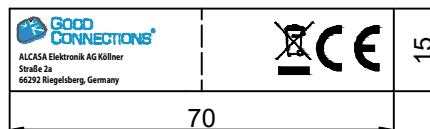


NOTE:

1. Electrical test!

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC 300V/5s 10MΩ min;
- (3). Contactor resistance: 3Ω max;
- (4). Support 4K*2K/60Hz, 18Gbps.

2. RoHS 2.0 compliant, REACH compliant


PIN OUT

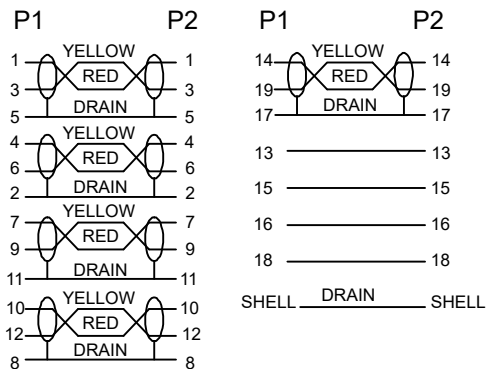

MODEL LIST

| Model | Length |
|----------|--------|
| 4520-005 | 500mm |
| 4520-010 | 1000mm |
| 4520-015 | 1500mm |
| 4520-020 | 2000mm |
| 4520-030 | 3000mm |
| 4520-050 | 5000mm |

PACKING DRAW

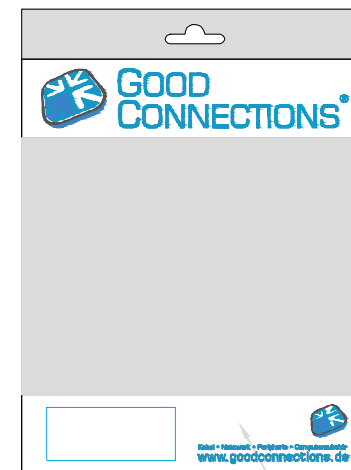

MATERIAL LIST

| | | | |
|-----|------------|---|-----|
| ⑦ | PACKAGE | GOOD CONNECTIONS ZIP BAG | 1 |
| ⑥ | DUST COVER | PE, COLOR: TRANSPARENT | 2 |
| ⑤ | PRINTING | HIGH SPEED HDMI CABLE WITH ETHERNET | L |
| ④ | CABLE | (1/0.25CCS*1P+1/0.25CCS+AL)*5PCS+1/0.25CCS*4C+AL+1/0.25CCS+80/0.12ALMG+BLACK PVC, OD: 6.0MM | |
| ③ | OUTER MOLD | PVC 88A, COLOR: BLACK | 2 |
| ② | INNER MOLD | LD-PE | 2 |
| ① | CONNECTOR | HDMI 19PIN A MALE, GOLD PLATED PIN, GOLD PLATED SHELL | 2 |
| No. | PART NAME | DESCRIPTION | QTY |



| DRAW No. | NAME | HDMI 2.0 CABLE | | | |
|------------|------------------|----------------|-----------|-------|--|
| CUSTOMER | Good Connections | MAPE | TOLERANCE | | |
| MODEL No. | 4520-xxx | | X. | ±1.00 | |
| APPROVE BY | CHECK BY | DATE | SCALE | MM | |
| KH | SiM | 09.07.2020 | PAGE | 1/1 | |